

DRACAST

LED FRESNEL SERIES



PRODUCT SPECIFICATIONS


POWER INPUT
LIGHT SOURCE
POWER CONSUMPTION
CRI
COLOR TEMPERATURE
LUMEN OUTPUT
LENS DEGREE
CONTROL PROTOCOL
REFRESH RATE
PROTECTION CLASS
DIMENSIONS
WEIGHT
MATERIAL

FRESNEL1000

AC100~240V, 50/60Hz or DC24V, 5A
CREE LED
100W
>90
5600°K, 3200°K, 3200°K-5600°K
>8500 LUMENS
15° - 60°
DMX512 / MASTER DIMMER / DIGITAL DIMMING
21000Hz
IP21
13" x 15.75" x 20.40"
18.75 LBS
ALUMINUM

FRESNEL2000

AC100~240V, 50/60Hz or DC24V, 10A
CREE LED
200W
>90
5600°K, 3200°K, 3200°K-5600°K
>17000 LUMENS
15° - 60°
DMX512 / MASTER DIMMER / DIGITAL DIMMING
21000Hz
IP21
13" x 18.90" x 20.40"
26.45 LBS
ALUMINUM

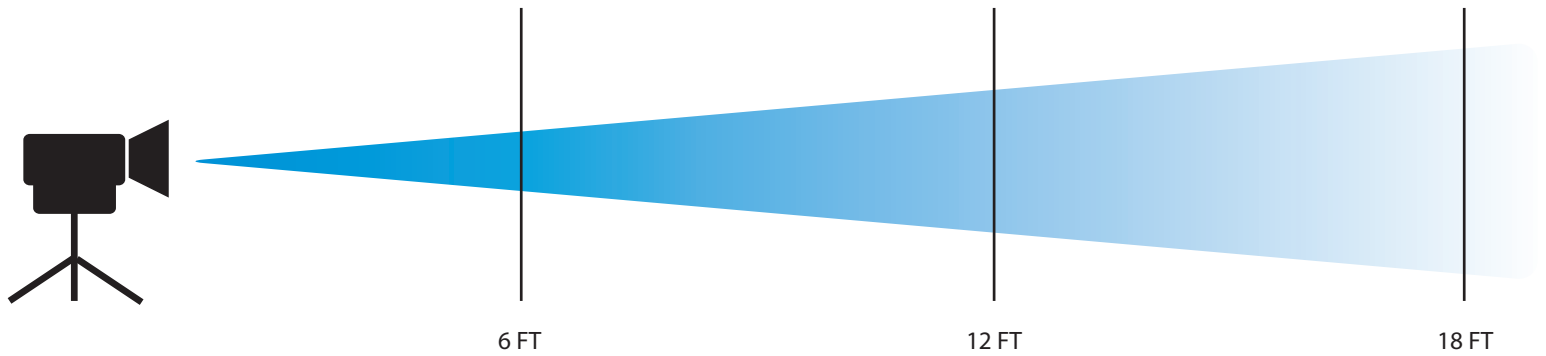

FRESNEL1000

	15°	60°	15°	60°	15°	60°
DAYLIGHT	4250LUX	1600LUX	1080LUX	400LUX	480LUX	180LUX
TUNGSTEN	3230LUX	1250LUX	720LUX	310LUX	340LUX	105LUX
BI-COLOR	3450LUX	1270LUX	860LUX	320LUX	380LUX	150LUX

FRESNEL2000

	15°	60°	15°	60°	15°	60°
DAYLIGHT	7500LUX	2900LUX	1800LUX	760LUX	790LUX	360LUX
TUNGSTEN	5500LUX	2370LUX	1350LUX	560LUX	590LUX	220LUX
BI-COLOR	5700LUX	2400LUX	2400LUX	590LUX	600LUX	260LUX

23 Las Colinas Lane #110
San Jose, CA 95119
www.dracast.com



(408) 229-9222
(408) 583-4362
sales@dracast.com



+dracast
dracast